

AP1055E

Asphalt Paver

"High Production, Smooth Results"




Leading-Edge Technology

- Cat® C7.1 engine meets Tier 4 Interim/Stage IIIB emission standards
- Advisor display, visual reference
- Self diagnostics from multiple ECMs displayed through Advisor
- Automatic engine speed control, fuel savings
- Eco-mode (1650 engine rpm) conserves fuel
- Cruise control feature, match paving train
- Screed lock, prevents screed settling
- Friction steer, holds steering direction in turns
- Power Management, maintains engine speed under load

Award Winning Smoothness Features

- Independent control of each auger and each conveyor, consistent head of material
- 2 or 4 sensor mix delivery system, automatically adjusts for width changes
- Hydraulic mainframe extensions
- Reversible augers and conveyors
- 4-position adjustable push roller
- Rigid electric screeds, excellent stability

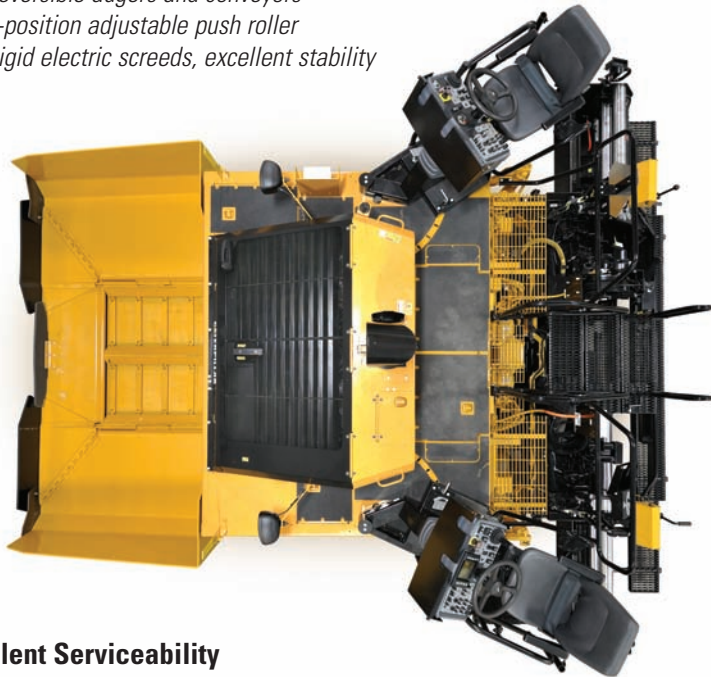

Excellent Serviceability

- Advisor display, lists service codes
- Manual overrides on hydraulics
- Visual indicators for routine service checks
- Electronic Control Modules monitor system performance and provide self diagnostics
- Long service intervals, minimize costs

Cat® Grade and Slope Control

- Continuous true averaging
- Factory integrated system
- Single or dual displays
- Single display can control one or both sides of the screed
- Text-based menus, with multiple languages
- Durable enclosure with swivel capability
- Sonic or contacting grade sensors
- Sonic averaging beam; utilizes up to 3 sonic sensors



Cat Grade and Slope Control



Mobil-Trac™ UnderCarriage

Durable Mobil-Trac™ Undercarriage

- Oscillating bogies, minimize tow-point movement for smoother results
- Long-belt life
- Excellent traction, soft/hard base capability
- Smooth-belt, less base disturbance and minimizes handwork
- Tread-bar belt, ultimate traction in any condition
- Speed of wheeled pavers



AP1055E Asphalt Paver Specifications

Operating Weights*

Tractor	16 810 kg	36,982 lb
w/AS2302C	19 894 kg	43,859 lb
w/AS3301C	20 076 kg	44,260 lb
w/AS3301C and C6.6 engine	20 310 kg	44,776 lb
w/AS4251C	21 158 kg	46,645 lb
w/AS4251C and C6.6 engine	21 392 kg	47,161 lb
w/AS4252C	20 211 kg	44,558 lb
w/AS4252C and C6.6 engine	20 445 kg	45,074 lb

Note: C6.6 engine utilized in Tier 3/Stage IIIA markets.

Machine Dimensions (operating)

Tractor length with push roller	4.95 m	16' 3"
Overall machine length w/screed		
AS2302C (walkway deployed)	5.80 m	19' 0"
AS3301C	6.61 m	21' 11"
AS4251C	6.52 m	21' 4"
AS4252C	6.63 m	21' 8"
Tractor operating width (hopper lowered)	3.60 m	11' 10"

Transport Dimensions

Transport height (fumes stack, seat lowered)	2.87 m	9' 5"
Transport width with screed end gates (hopper raised)	3.24 m	10' 8"
Transport width w/o screed end gates (hopper raised)	3.00 m	9' 10"

Screed Paving Width

AS2302C, maximum range	3.05 m - 6.70 m	10' - 22'
AS3301C, maximum range	3.05 m - 7.38 m	10' - 24' 2"
AS4251C, AS4252C, maximum range	3.05 m - 8.00 m	10' - 26' 4"
Maximum paving depth	305 mm	12"

Optional Equipment

- Auger and Mainframe Extensions
- Auxiliary Power Panel
- Cut-Off Shoe
- Decelerator Pedals
- Ecological Washdown System and Hose Reel
- Feeder Sensor (Mechanical or Sonic)
- Friction Steering
- Fumes Extraction
- Grade and Slope Controls (Cat/Topcon)
- Hard Top Canopy
- Leveling Devices
- Lights (Working or Rooding)
- Mobil-Trac Belt (Smooth or Treadbar)
- Oscillating Push Roller
- Power Folding Front Apron
- Power Mainframe Extensions
- Product Link
- Screed Extensions
- Tow-point Indicators (Upper)
- Track Plow
- Truck Hitch
- Umbrella
- Up-time Kit
- Warning Beacon
- Wide Width Paving Packages

Optional equipment may vary per region, contact your local Cat Dealer for more information.

The Cat® Advantage - Single Source Provider

	Cat Dealer	Competitive Dealer	Comment
Convenient worldwide dealer locations	✓		More than our 5 largest competitors combined
Engine service	✓		Cat machines feature Cat engines
Machine service	✓	✓	
Service technician trained for paving equipment	✓		Cat technicians trained on Cat machines
24/7/365 parts availability on most service parts	✓		Long lead times for competitive OEM parts
New OEM parts	✓		Competition offers inferior aftermarket parts
Reconditioned OEM parts	✓		Rebuilt to OEM spec by Cat Reman
Available financing options	✓		Available through Cat Financial
Application expertise	✓		Personnel understand the paving business
Machine rental	✓		Keeps your capital expense low
Products with high resale value	✓		Durable Cat machines built to last

QEXQ1491 (4-11)

